



SKU: # EVO274MD-UHD

Medical Grade	Anti-fingerprint	Antibacterial	CDC Cleaning	Ingress Protection	Made in USA
---------------	------------------	---------------	--------------	--------------------	-------------

27" UHD Evolution MD Multi-Touch LED Touch Screen

Touch Screen Performance (Evolution-Touch)

- Superior High-Performance Projected Capacitive (Unlimited Touch Activations)
- 10 Point Multi-Touch (Finger, Capacitive Stylus, Nitrile, Latex and Vinyl Gloves)
- USB HID compliant & Driver free with no calibration
- Ultra Fast Precision Touch Response
- Requires human intentional touch (HIT)
- Anti-Fingerprint Oleophobic nano-coating
- Noise Immunity (Advanced technology to eliminate wide band and narrow band interference)
- 3mm thick, sealed full glass display
- Touch operation is unaffected by surface contaminants



Applications

- Surgical
- Nurse Stations
- Industrial

Certifications

- 60601-1
- IPX2
- IP34

Display Performance

- Medical "A" Grade LCD Panel/ 16:9
- Edge-to-Edge sealed 3mm glass surface
- Integrated Multi-Media Speakers
- Industrial Cooling
- America's Best Commercial Warranty 4 Years with advanced replacement
- Proprietary CFD Designed Ventilation
- Custom vent system to limit dust collection and prevent fluid intrusion
- (MTBF) 124,000 Hours
- HDMI 2.0 (HDCP Compatible) input provides expanded connectivity with advanced technology
- VESA compliant
- Locking power supply connection
- Made in the USA



Designed and Manufactured by Tech Global, Inc. in Chicago, IL

SPECIFICATIONS

Touch Interface

Touch Response

Evolution-Touch (PCT/ Anti-Fingerprint/ Anti-Glare): USB/ HID Compliant

5ms

Display

Viewable Image Size

24/7 Medical "A" Grade Display/ Edge-Lit LED LCD

27"/ 16:9

Mean Time Between Failure (MTBF)

124,000 Hours

Pixel Pitch

0.1554mm

Color Depth

1.07 Billion colors, 10Bit

Brightness

350 cd/m2

Contrast Ratio

3000:1

Ultra HD Resolution

3840 x 2160 (4K)

Viewing Angle

178° Vert., 178° Hor.

Response Time

LCD Rapid Response (25ms)

Internal Speakers

Built-in multimedia speakers provide quality sound

Input Signal

Input Connectors

DisplayPort, HDMI and DVI

Audio

In (1)

Power Consumption

On

29W/ Power Savings Mode .6W/

Dimensions (WxHxD)

Net (with stand)

25.8 x 15.7 x 8.1 in.

Net (without stand)

25.8 x 15.7 x 1.7 in.

Net Weight (with stand)

24 lbs.

Net Weight (without stand)

20 lbs.

VESA Hole Configuration Specification

100 x 100mm/ 200 X 100mm

Environmental Conditions

Operating Temperature

5-35C/41-95F

Operating Humidity

20-80%

Operating Altitude

2000m / 6562 ft.

Storage Temperature

-10-60C/14-140F

Storage Humidity

10-85%

Storage Altitude

12,192m/40,000 ft.


Warranty

4 years parts and labor including backlight and touch components



TechGlobal



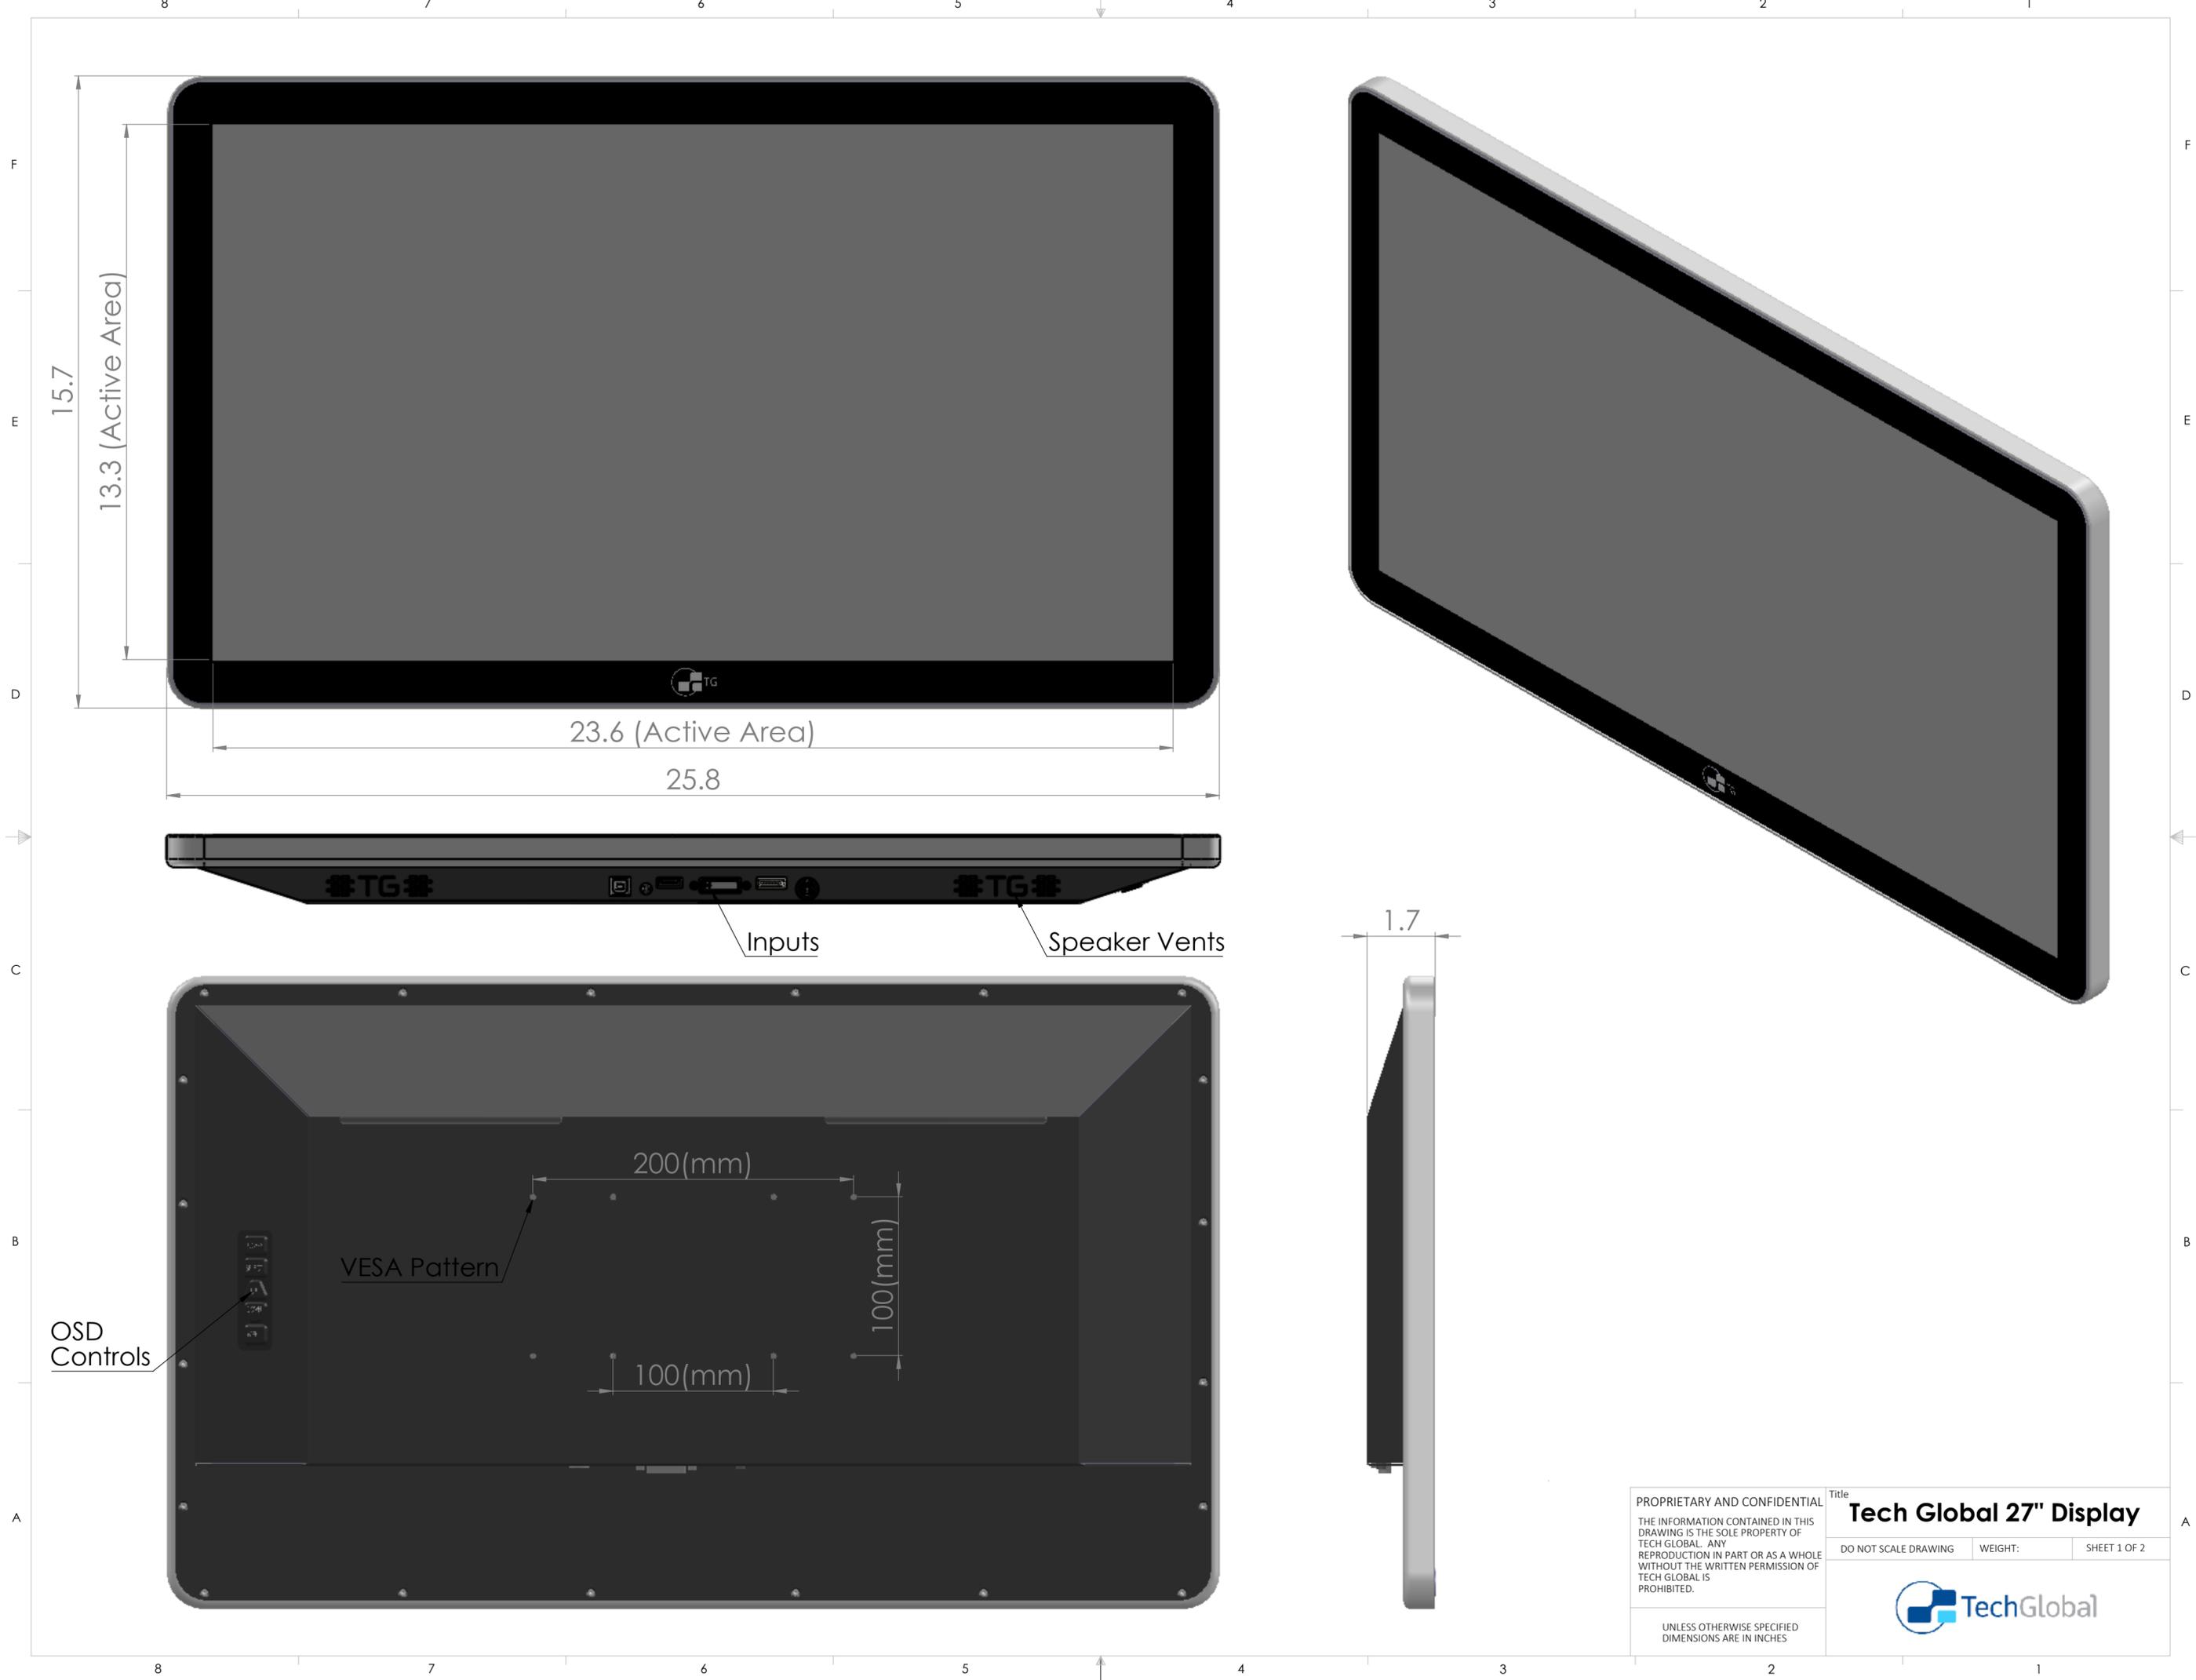

15.7
13.3 (Active Area)

23.6 (Active Area)
25.8



Inputs Speaker Vents

VESA Pattern


200(mm)
100(mm)
100(mm)

OSD Controls

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TECH GLOBAL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TECH GLOBAL IS PROHIBITED.	Title Tech Global 27" Display	
	DO NOT SCALE DRAWING	SHEET 1 OF 2
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	WEIGHT:	
		

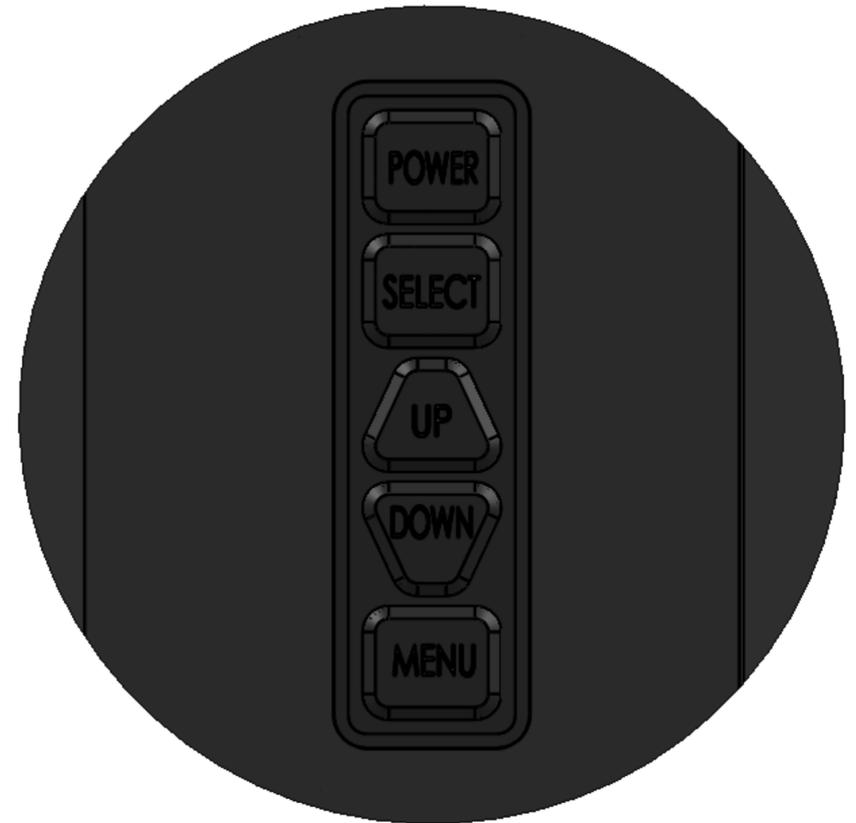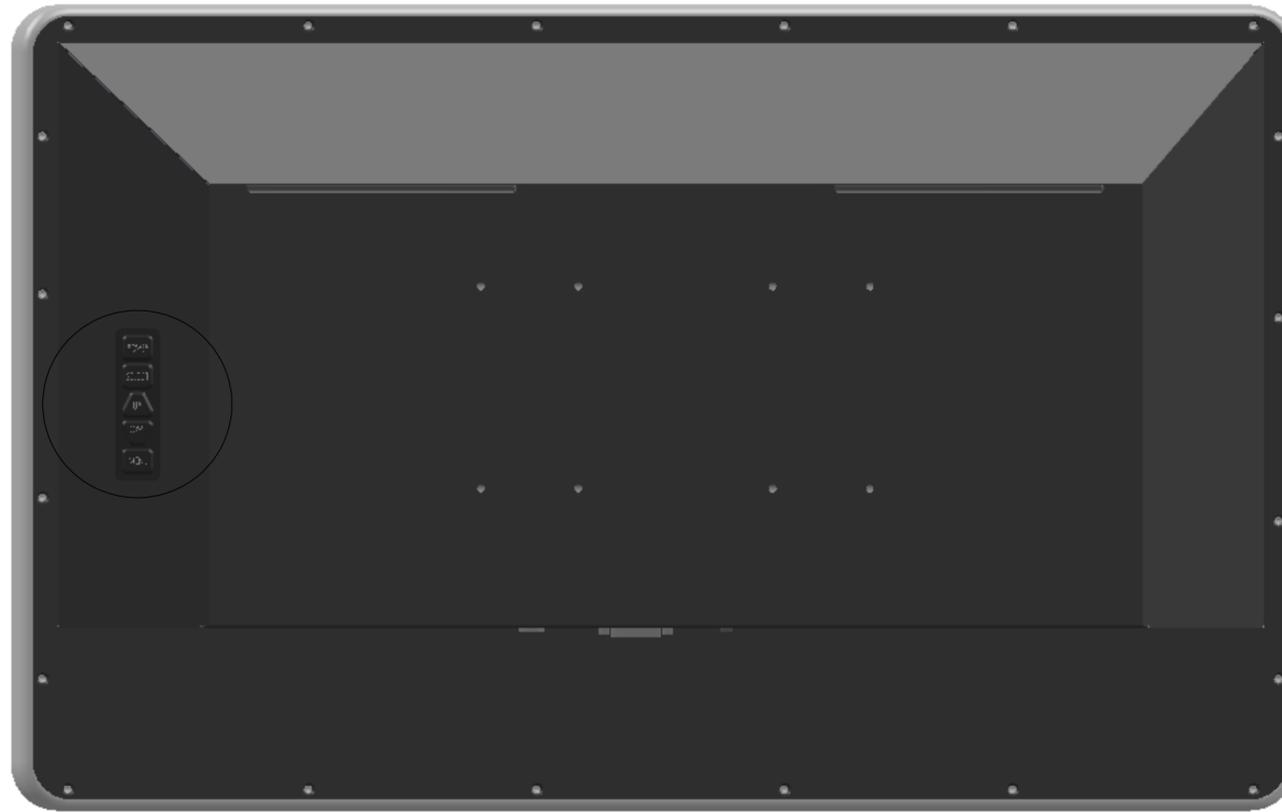

OSD Controls

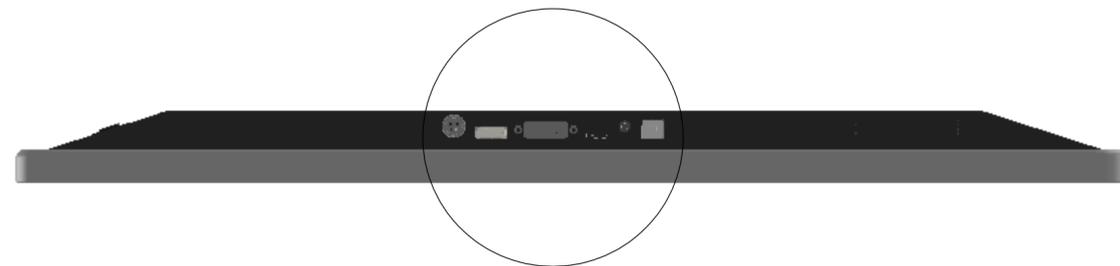

Inputs: DC Power, Display Port, DVI, HDMI, Audio In, USB Type B*
(As Seen Left To Right)

*Touch Model Only

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TECH GLOBAL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TECH GLOBAL IS PROHIBITED.	Title Tech Global 27" Display	
	DO NOT SCALE DRAWING	WEIGHT:
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		